

# ORIONE

## Blender



Orione Q VV Timer



Orione Q VV Plus SE

- Robust powerful range of bar blenders with hardened steel blades making them ideal for a wide variety of uses including mixing, pureeing and liquefying
- Air-cooled 1 Hp motors
- Highly resistant Tritan jugs
- Tempered stainless steel blades
- Fully removable jug for easy cleaning
- Rubber cap on lid for opening whilst in operation to add extra ingredients
- Orione Q VV Timer features a variable speed control and a timer
- Orione Q VV Plus SE features a variable speed control, 9 pre-programmed recipes and a sound-reduction enclosure

### Features

#### Technical:

- The rugged 1 Hp motors are fan cooled.
- Their sealed ball bearing system and the direct gear transmission give a quite and long lasting operation.
- The Tritan containers are virtually unbreakable.
- A feed opening on the lid allows for adding products while the blender is working.
- Easy-grab handle for faster and safer container handling.
- Durable one-piece blade design for creamier and smoother drinks.

#### Sanitary:

- The Tritan container is BPA free and dishwasher safe.
- The blenders are built with highly hygienic materials.
- Easy to disassemble and clean.

### Specifications

#### Construction:

Base is made from aluminum, the container is made from Tritan and the blades are stainless steel.  
750 W, direct transmission.

#### Motor:

#### Electrical:

120V AC, 60Hz, 6.33 Amp. (220V, 50Hz available on request).

#### Plug & Cord:

Detachable, flexible, 3 wire SJT AWG 18, 6' long.

#### Switch:

ON / OFF / Pulse, timer and speed control buttons.



Orione Q VV Timer



Orione Q VV Plus SE




Easy breakdown for cleaning



Stainless steel gears



Stackable containers

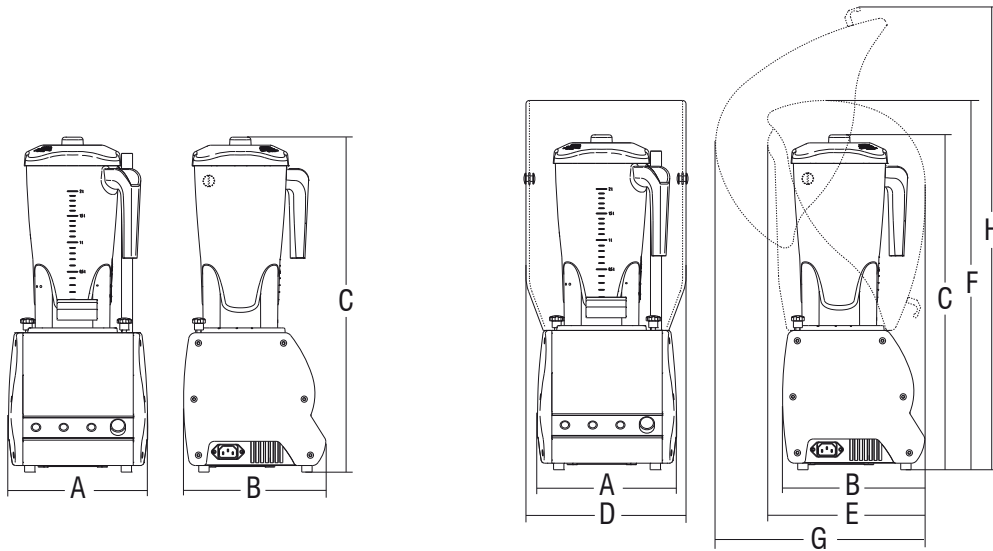

	Power	Power source	Revolutions/min.	Jug capacity	A	B	C	D	E	F	G	H	Net weight	Shipping	Gross weight
	watt/hp		r.p.m.	oz.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
<b>Orione Q VV Timer</b>	750/1	120V AC, 60Hz, 6.33 Amp.	14.000 / 24.000	68	8 <sup>3</sup> / <sub>16</sub> "	8 <sup>17</sup> / <sub>64</sub> "	19 <sup>3</sup> / <sub>32</sub> "						11	12 <sup>1</sup> / <sub>64</sub> " x 12 <sup>1</sup> / <sub>64</sub> " x 20 <sup>43</sup> / <sub>64</sub> "	15
<b>Orione Q VV Plus SE</b>	750/1	120V AC, 60Hz, 6.33 Amp.	14.000 / 24.000	68	8 <sup>3</sup> / <sub>16</sub> "	8 <sup>17</sup> / <sub>64</sub> "	19 <sup>3</sup> / <sub>32</sub> "	9 <sup>29</sup> / <sub>64</sub> "	9 <sup>1</sup> / <sub>16</sub> "	21 <sup>1</sup> / <sub>16</sub> "	12 <sup>13</sup> / <sub>32</sub> "	26 <sup>3</sup> / <sub>8</sub> "	13	12 <sup>2</sup> / <sub>16</sub> " x 11 <sup>13</sup> / <sub>16</sub> " x 20 <sup>7</sup> / <sub>8</sub> "	19