

"DT3B" Clean Dishtable / Pot Sinks

Three Compartment Sinks w/ Stainless Steel Base & Bracing





STANDARD: 16 ga. 300 S/S welded Bowls 16 ga. 300 S/S sides and Splash 10" Back Splash

| STANDARD | , |
|-----------------|-----|
| 16 Gauge | Qty |
| DT3B18244-2D24L | |
| DT3B18244-2D24R | |
| DT3B244-2D24L | |
| DT3B244-2D24R | |

FEATURES:

- * Standard 16 Gauge Type 300 stainless steel with # 4 polish, satin finish
- * 14" Deep Bowls
- * All Corners, both vertical and horizontal, coved at 3/4" radius
- * Bottoms of bowls formed for drainage to 3-1/2" diameter die stamped opening
- * Full length 10" High Boxed Backsplash, with 2" return to wall at 45 degree and 1" turned down rear lip
- * 1-1/8" Faucet Holes in Backsplash
- * All outside corners of assembly are Bullnosed to provide safe, clean and polished edge
- * Standard stainless steel legs 1-5/8" diameter
- * Legs located directly under sink bowls, providing increased stability and maximum weight support
- * Includes: (3) Rack Slides w/ Storage Bracket

Bowl Sizes:

18" X 24" 24" X 24"

CONSTRUCTION:

Top: Stainless Steel Sinks are TIG welded, Exposed welds

are polished to match adjacent surface.

Stainless Steel Bases are MIG welded Bases:

OPTIONAL ACCESSORIES

MATERIAL:

Bowls & 16 gauge stainless Steel

Type 300 stainless steel with #3 polish, satin finish Top:

1 5/8" Round O.D., stainless steel Legs: 1 1/4" Round O.D., stainless steel Bracing:

Stainless Steel Gussets:

Feet: 1" adjustable stainless steel bullet feet


| | Qty |
|-----------------|-----|
| FAUCETS | |
| ADD-A-FAUCETS | |
| PRE-RINSE UNITS | |
| LEVEL WASTE | |
| OVERSHELVES | |
| POT RACK | |

John Boos & Co


315 South First Street - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705 Email: sales@johnboos.com - Web-site: www. johnboos.com


DETAILED SPECIFICATIONS

| BOWLS | F | G | Н |
|---------|---------|-----|-----------|
| 18 X 24 | 29-1/2" | 24" | 14-15/16" |
| 24 X 24 | 29-1/2 | 24" | 14-15/16" |



| Α | 16-1/4" | | |
|---|---------|--|--|
| В | 14" | | |
| С | 10" | | |
| D | 43" | | |



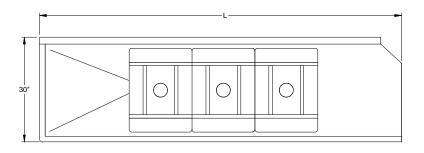

| STANDARD 16 GAUGE | | | | | | | | |
|-------------------|-----|--------|------------|--------|-----|-----|--|--|
| MODEL | BOW | L SIZE | DIMENSIONS | | DB | WT. | | |
| DT3B18244-2D24L | 18" | 24" | 30" | 103.5" | 24" | 420 | | |
| DT3B18244-2D24R | 18" | 24" | 30" | 103.5" | 24" | 420 | | |
| DT3B244-2D24L | 24" | 24" | 30" | 121.5" | 24" | 550 | | |
| DT3B244-2D24R | 24" | 24" | 30" | 121.5 | 24" | 550 | | |

All dimensions are typical.

Tolerance +/- .500".

All units ship unassembled for reduced shipping cost.

John Boos & Co

315 South First - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705 Email: sales@johnboos.com - Web-site: www.johnboos.com



July 2011

John Boos is constantly engaged in a program of improving products and therefore reserves the right to change specification without prior notice