Anets SilverLine 14" Gas Fryer

Model SLG40

Built To Anets Standards, Priced For Today's Market, The SilverLine Fryer From Anets

Anets provides the best value in frying with the new SLG40 gas fryer. The improved design provides an affordable fryer that keeps up with load after load of production. The heating system has been engineered for maximum efficiency and cleanability. Using 2 burner tubes equipped with computer designed radiants, this fryer requires only 90,000 BTU input to achieve maximum cooking capacity. The unique shape of the tubes allows easy access to all areas of the frypot. Center mounted snap action thermostat responds quickly to fry loads. The Anets SLG40 is built to perform, easy to clean, and priced to purchase today.

STANDARD FEATURES

- Stainless steel front, door and trim are standard features
- 90,000 BTUH from only two tubes, easiest model on the market to clean
- Computer designed radiants enable the burners to efficiently reach 45,000 BTUH per burner tube
- The unique tapered elliptical tubes provide 14% more heat transfer area than competitive models (see **Design Features** on back)
- Outstanding serviceability, all components easily accessible and replaceable from the front
- Stainless steel basket hanger lifts off for easy cleaning
- Food particles fall below burner tubes into cold zone to prolong shortening life
- Large 1¹/₄" ball-type full port drain valve prevents clogging









Anetsberger, LLC P.O. Box 501 • Concord, New Hampshire, 03301 •U.S.A 1-603-225-6684 • Fax 1-603-225-8497 • www.anetsberger.com

Model SLG40

SPECIFICATIONS

- Model
- Certification
- Gas Input
- Gas Pressure
- Gas Connection
- Electrical Requirements
- Thermostat
- Temperature Range
- Hi-Limit
- Safety Pilot
- Burners
- Frypot
- Cabinet
- Shortening Capacity
- Frying Area
- Shipping Weight
- Warranty

STANDARD ACCESSORIES


- 2 Twin nickel plated baskets
- Rack type basket support
- 6" Adjustable legs
- Drain pipe extension
- Flue extension/Diverter

SLG40, Stainless steel frypot NSF, ETL, CETL 90,000, BTU/hr. NG 3.5" WC, LP 10" WC ¹/₂" NPT None Snap action millivolt control $200^{\circ}-400^{\circ}F$, (93 $^{\circ}-204^{\circ}C$) Safety control turns off gas supply at 440°F (227°C) 100% gas shut off valve Cast iron, atmospheric pre-mix Stainless steel Door, stainless steel Backsplash, stainless steel Basket Hanger, stainless steel 40 lbs 14" x 14.5" (36cm x 37cm) 145 lbs. 1 year parts and labor

I year parts and labor Stainless steel frypot: 5 years (pro-rated)

OPTIONS AND ACCESSORIES


- Single or triple baskets
- Casters

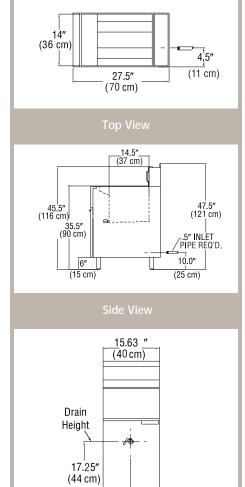



7.75"

(20 cm)

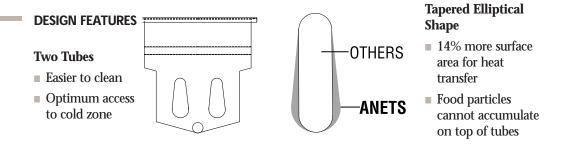

Specifications subject to change without notice.

Printed in the U.S.A.



Anetsberge, LLC P.O. Box 501 ÔConcord, New Hampshire, 03301 ÔU.S.A 1-603-225-6684 ÔFax 1-603-225-8497 Ôwww.anetsberger.com