



IM-1100 Ice Cube Machine


Models

- IM-1100-AC
 IM-1100-AH
 IM-1100-WC
 IM-1100-WH
 IM-1100-RC
 IM-1100-RH



ICETRO IM-1100 ice machine on a IB-044 bin

*Ice Machine and Bin sold separately

- Up to 1,106 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- Simple diagnostic panel to assist service & maintenance
- ENERGY STAR® qualified (air-cooled only) 
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Side & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- R-404A refrigerant

Ice Shape



Half Cube
 $\frac{3}{8}$ " x $1\frac{1}{8}$ " x $\frac{7}{8}$ "
 (.95 x 2.86 x 2.22 cm)



Cube
 $\frac{7}{8}$ " x $\frac{7}{8}$ " x $\frac{7}{8}$ "
 (2.22 x 2.22 x 2.22 cm)

Factory Warranty

Parts & Labor	Parts	Parts
3 YR	5 YR	5 YR
Ice Maker	Evaporator	Compressor



Extend ice machine warranty 1 year by installing an IcePro 1300 with ice machine.

* Applies only to new ice machines, at the time of original installation & start-up.

Specifications

BTU Per Hour:

17,647

Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

Ice Machine Electric

208-230/60/1

Minimum circuit ampacity:

Air-cooled: 15.6 *1ph*
 Water-cooled: 15.6 *1ph*
 Remote: 15.6 *1ph*

Maximum fuse size:

Air-cooled: 25 *1ph*
 Water-cooled: 25 *1ph*
 Remote: 25 *1ph*

Accessories

Refrigeration Line Set

IRT-20R404 20' line set
 IRT-35R404 35' line set
 IRT-50R404 50' line set



Bin Adapter
 IBT-3048B
 Center Mount
 48" Bin



Bin-Stat Kit IBO-150KIT

Recommended when ice machine is installed on soda dispenser.



Water Filtration IcePro 1300


Reduces sediment and chlorine contaminants with the use of Citrine.






IM-1100 Ice Cube Machine


IM-1100 Air Cooled

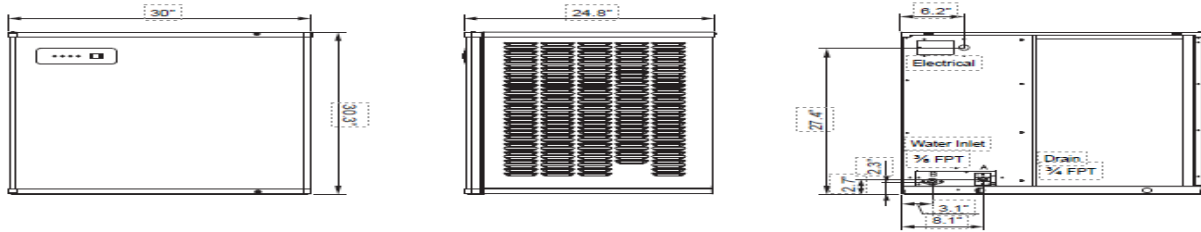

IM-1100 Water Cooled

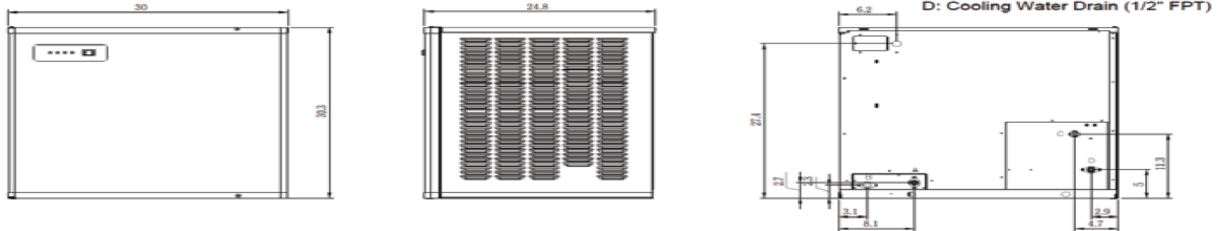

IM-1100 Remote Cooled

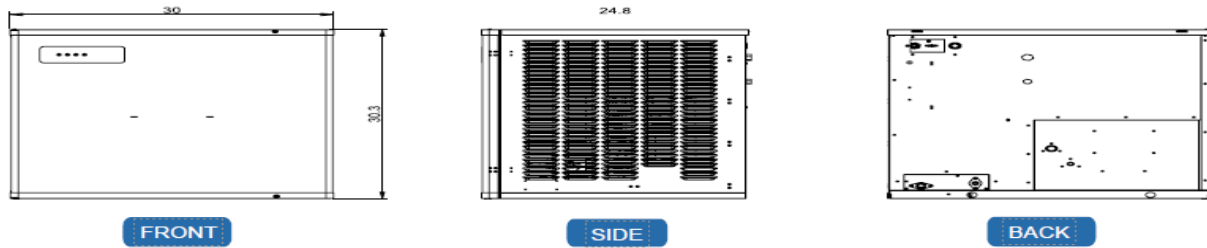

FRONT

SIDE

BACK

Specifications

Dimensions	Width	Depth	Height	Weight
IM-1100 Machine	30"	24.8"	30.3"	231.5 lbs (Net) 262 lbs (Shipping)
IRC-1100 Condenser	22.6"	35.6"	27.1"	80 lbs (Net) 105 lbs (Shipping)

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
		70°Air/ 50°F Water	90°Air/ 70°F Water		
AIR COOLED	cube	1 ph	1 ph	4.99	14 Gal.
		1106 lbs	983 lbs		
	half-cube	501 kgs	447 kgs	4.99	14 Gal.
		1106 lbs	983 lbs		
WATER COOLED	cube	1036 lbs	1004 lbs	4.13	14 Gal.
		470 kgs	455 kgs		
	half-cube	1036 lbs	1004 lbs	4.13	14 Gal.
		470 kgs	455 kgs		
<i>RC-1100 vertical discharge condenser order separately for Remote cooled units</i>					
REMOTE COOLED	cube	1081 lbs	949 lbs	4.72	15 gal
		490 kgs	431 kgs		
	half-cube	1081 lbs	949 lbs	4.72	15 gal
		490 kgs	431 kgs		

