www.falconequipment.com
4340 West 850 South.
Salt Lake City, UT 84104
Phone: 801.263.3339 - Ext. 2604

Model #AR-49G

Standard Features

- Two self-closing, anti-fog glass doors
- Interior LED lighting
- (8) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- 430 stainless exterior painted aluminum interior
- Eco-friendly R290 hydrocarbon refrigerant
- ETL Safety & Sanitation Listed

Cooling

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.8
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	96”

Construction

Exterior Material	430 Stainless Steel
Interior Material	Painted Aluminum
Door Type	Glass Swing Doors
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(8) 18-3/4" x 21-1/4”
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lbs.

Dimensions

Exterior Dimensions	54"W x 32-1/4"D x 82-1/2"H
Interior Dimensions	49-3/8"W x 27"D x 53-1/2"H
Shipping Dimensions	57"W x 35"D x 87"H
Net Volume	28 cu. ft.
Net Weight	375 lbs.
Gross Weight	418 lbs.

Intertek Intertek

2 YEAR WARRANTY Parts & Labor

5 YEAR WARRANTY Compressor

PLAN VIEW

Front View

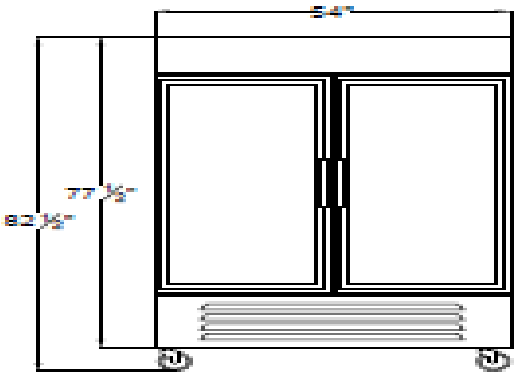

Side View

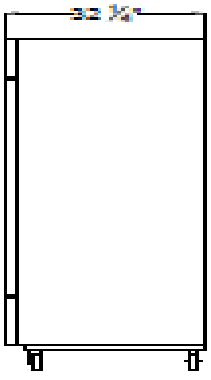
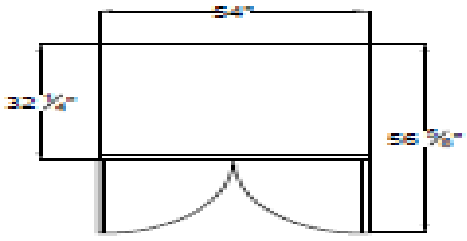
Top View