

AMERICAN RANGE®

A  Company

Project _____

Item # _____

Quantity _____

RADIANT CHARBROILERS

GAS TYPE: NATURAL LP



- ARRB-24
- ARRB-36
- ARRB-48
- ARRB-60
- ARRB-72

STANDARD FEATURES

- Stainless steel front and sides.
- Individually controlled 15,000 BTU/hr. straight burners spaced 6" apart.
- Optimum heat distribution with heavy duty angled radiants control flare-up.
- Radiants are removable for easy cleaning.
- Heavy duty reversible cast iron 3" x 21" top grates, with grease runners direct the run off to the removable grease channel provides attractive markings on food.
- Full width removable grease pan for easy cleaning.
- 4" adjustable height legs included
- Two year limited warranty, parts and labor

AVAILABLE OPTIONS

- Stainless steel stand.
- Swivel casters (set of four – two with front brakes).



Model Shown ARRB-24

DESCRIPTION

American Range ARRB series charbroilers feature a countertop design and 15,000 BTU/hr. straight burners every six-inches for efficiency and performance. Angled radiants come standard to control flare-up. Models come in a range of sizes from 24" to 72" wide. Cast-Iron angled top grates. Stainless steel exterior construction makes this charbroiler both durable and easy to clean.




DESIGNED & BUILT IN USA
PROFESSIONAL COOKING EQUIPMENT

AMERICAN RANGE®

A  Company

13592 Desmond St Pacoima CA 91331
T. 818.897.0808 Toll Free: 888.753.9898
www.AmericanRange.com

RADIANT CHARBROILER

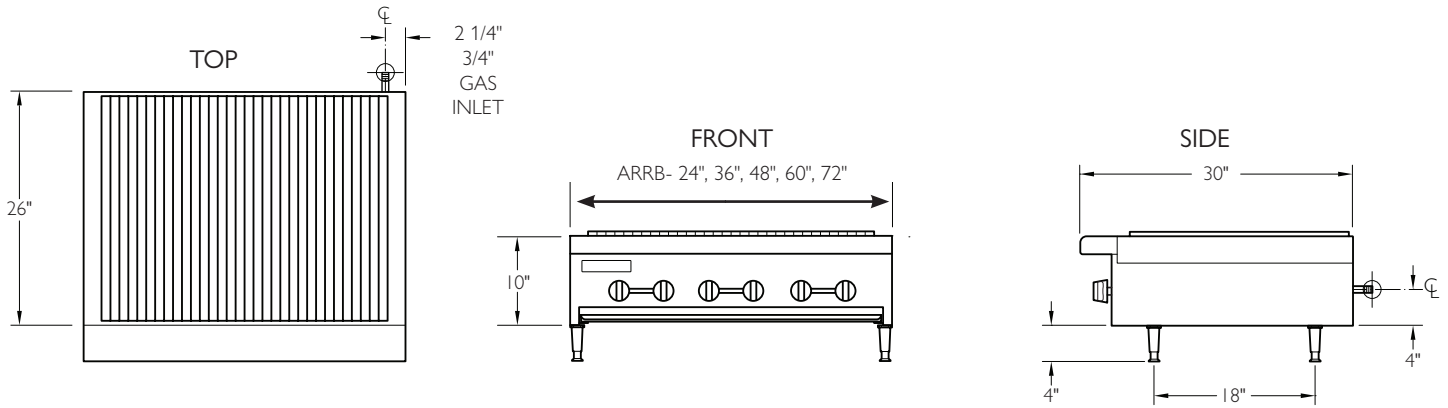

Model	Width (mm)	Depth (mm)	Height (mm)	Burners	Total BTU	(kW)	Crated Dimension (mm)	Shipping Weight	
								Lbs	(kg)
ARRB-24	24" (610)	30" (762)	14" (356)	4	60,000	(18)	29" (737) x 36" (914) x 18" (457)	210	(95)
ARRB-36	36" (914)	30" (762)	14" (356)	6	90,000	(26)	41" (1041) x 36" (914) x 18" (457)	285	(129)
ARRB-48	48" (1219)	30" (762)	14" (356)	8	120,000	(35)	53" (1346) x 36" (914) x 18" (457)	363	(165)
ARRB-60	60" (1524)	30" (762)	14" (356)	10	150,000	(44)	65" (1651) x 36" (914) x 18" (457)	400	(181)
ARRB-72	72" (1829)	30" (762)	14" (356)	12	180,000	(53)	77" (1956) x 36" (914) x 18" (457)	560	(254)

- Specify type of gas and altitude if over 2000 feet.
- Please specify gas type when ordering.

COMBUSTIBLE WALL CLEARANCES:

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear.

Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard.

NFPA96 "Vapor Removal from Cooking Equipment."
(NOTE: For North America only)

Subject to change without notice.

NMFCCODE: 25970-2 Class: 85

*Shipping weight includes packaging and is approximate.

NATURAL GAS	MANIFOLD PRESSURE	
	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19MM)

Optional Stainless Steel Shelf

Model	Lbs.	(kg)
ESS-24	47	(21)
ESS-36	54	(24)
ESS-48	72	(33)
ESS-60	99	(45)
ESS-74	110	(50)

