



BEVERAGE-AIR

Project: _____
Item: _____
Location: _____
Approved: _____

AIA#

SIS#

WTR46AHC SIDE MOUNT WORKTOP REFRIGERATOR

SIDE MOUNT WORKTOP WTR46AHC Solid Door Refrigerator Hydrocarbon Series

MODEL:
WTR46AHC



7 Year Parts/Labor Warranty
7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- 16 Gauge stainless steel top
- Full electronic control
- Interior thermometer is standard
- 4" Foamed-in-place backsplash
- Self-closing door with 120° stay-open feature
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- Right or left hinged door
- Door lock
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Flat-top with no backsplash (-FLT)
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR®

| MODEL | WTR46AHC |
|------------------------------------|---|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 46" |
| Depth Overall with Handle & Bumper | 35 ³ / ₄ " |
| Height Overall with 6" Casters | 39 ¹ / ₂ " |
| Number of Doors | 1 |
| Depth with Door Open 90° | 57 ¹ / ₈ " |
| Door Opening | 21 ¹ / ₂ " x 23 ³ / ₈ " |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 10.8 |
| Internal Width Overall (in) | 42" |
| Internal Depth Overall (in) | 26" |
| Internal Height Overall (in) | 24 ³ / ₄ " |
| Number of Shelves | 2 |
| ELECTRICAL DATA | |
| Full Load Amperes | 2.0 |
| Voltage | 115/60/1 |
| Nema Plug (8' cord) | 5-15P |
| REFRIGERATION DATA | |
| Horsepower | 1/6 |
| Capacity (BTU/Hr) | 1350 |
| Heat Rejection (BTU/Hr) | 2025 |
| Charge (lbs/grams/ounces) | 0.243 / 110 / 3.9 |
| SHIPPING DATA | |
| Gross Weight - Crated | 325 lbs |
| Height - Crated | 44" |
| Width - Crated | 49" |
| Depth - Crated | 35" |


*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements,
additions or replacements for previously purchased equipment. Dimensional
tolerances +/- 1/4". Metric dimensions (MM).


Worktop Refrigerator - Side Mount Model: WTR46AHC

Model Views


Required Clearance: 3" Bottom & 2" Rear

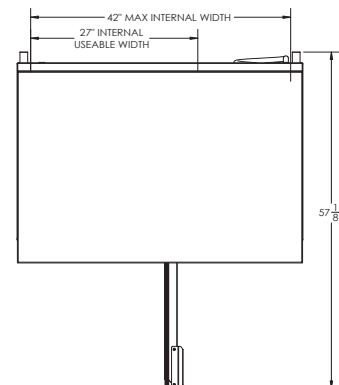

PLAN VIEW

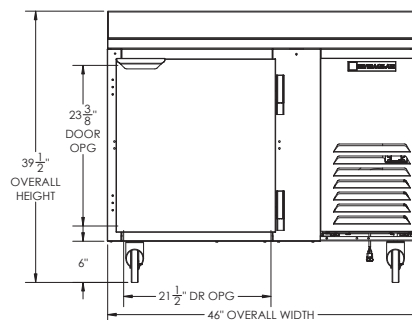

ELEVATION VIEW

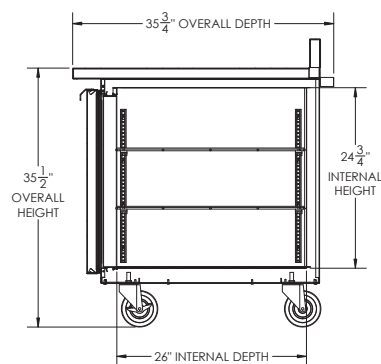

SIDE VIEW

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at factory
and include 8' long cord
and plug set.