

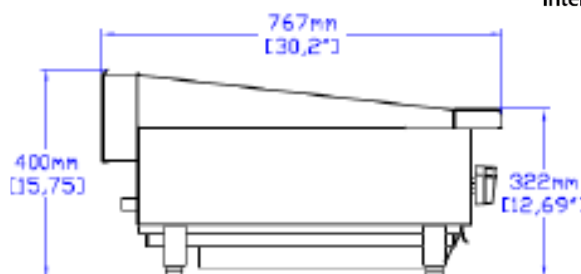


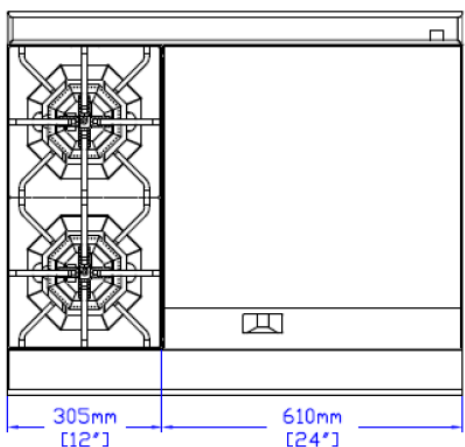

Tabletop Combo

36" wide frame: 2 open burners, 12" griddle,
Model CS-2HP-24G

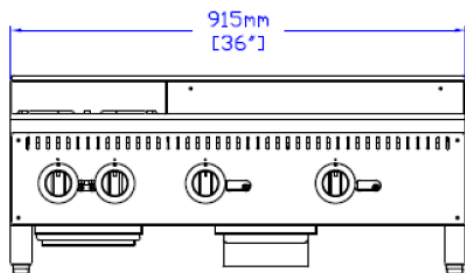

Standard Features & Benefits

CONSTRUCTION: Easy cleaning, corrosion resistant stainless steel finish. Adjustable stainless steel legs for easy leveling.


GRIDDLE: 20.25" deep x 3/4" thick plate with stainless steel splash guards. High polish cold rolled steel cook surface. (2) 30,000 BTU "U" shaped burners centered spaced for optimum heat distribution. A deep, large capacity grease drawer is provided.

OPEN BURNERS: Efficient cast iron "hex" burners are rated at 25,000 BTU's each provide even heating across the cooking surface.

TOP GRATES: Heavy 12 x 12" wide cast iron top grates designed to slide pots easily across the cook-top.

CONTROLS: Reliable brass gas valves and automatic standing pilots. Pressure regulators are set at the factory for the gas specified. Conversion kits are included. Optimal pressures are 4" WC for natural gas and 10" WC for propane. Manifold size is 3/4" NPT. All controls are tested and confirmed in good working order. Calibration and adjustments are the responsibility of the installer.

SPECIFICATIONS		
Model	CS-2HP-24G	
Width	in.	36
	mm	915
Depth	in.	30.2
	mm	767
Height	in.	15.75
	mm	400
Approx. Ship Weight	lbs.	275
	kgs.	125
Flat Top Griddle BTU	60,000	
Open burners BTU	50,000	

 **WARNING:** This product can expose you to certain chemicals, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to: www.P65Warnings.com

NOTICE: In an ongoing effort of product development & improvement, Comstock-Castle reserves the right to change specifications and product design without notice. Such modifications do not entitle the buyer to corresponding changes or replacements for previously purchased equipment.



Comstock-Castle Stove Co. • 119 W. Washington St. • Quincy, IL. 62301
Tel.: 217-223-5070 • Fax.: 217-223-0007 • Web: www.castlestove.com

