
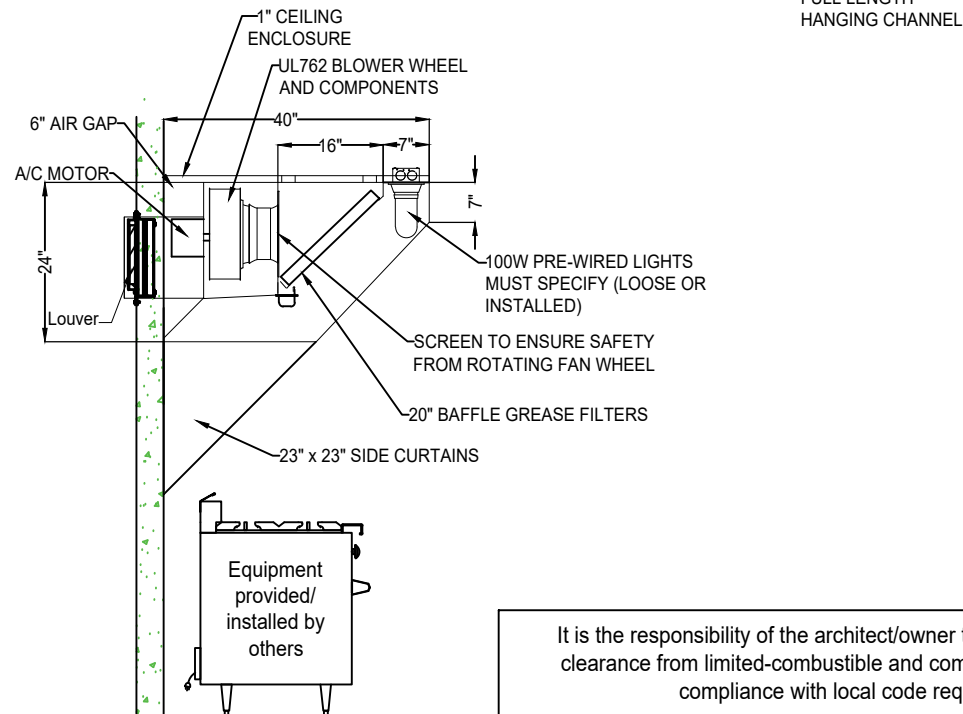


## Low Box Concession Trailer (TYPE I)

### Hood General Specifications

- First UL710 listed assembly with intergrated fan, tested in accordance with AMCA 210-16 and ASHRAE 51-16
- NFPA96 and IMC approved
- FDNY COA listed
- NSF certified
- **6'-1" - 10'-0"** long with dual blowers and outlets
- Hoods are constructed of 18 gauge stainless steel
- All joints are welded liquid tight, without seams
- Grease Filters are 20" stainless steel baffle type which carry a UL listing
- Grease trough is made to receive grease extracted by the filter
- Each Grease trough is equipped with a stainless steel cup
- Factory mounted grease duct with louver
- 100W incandescent Lights are shipped loose (Can be installed)
- 1" Ceiling enclosure installed on top of hood with (2) structural full length hanging channels
- Integrated dual 1100 CFM fans (2200 CFM total)
- 115/1/60, 10.4 amps total draw
- **PATENT PENDING**

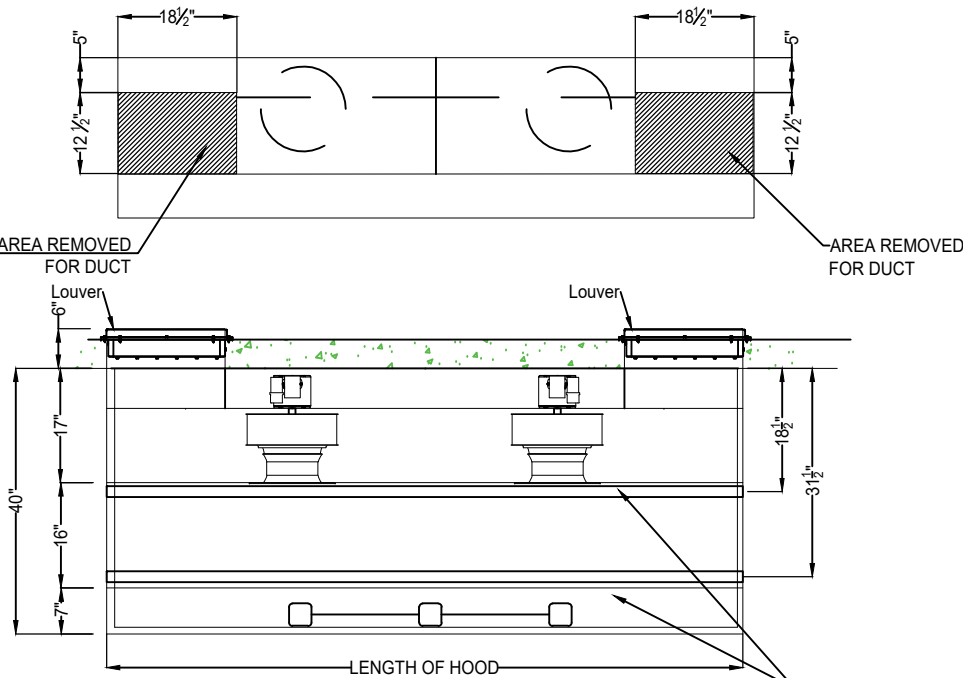

It is the responsibility of the architect/owner to ensure that the hood clearance from limited-combustible and combustible materials is in compliance with local code requirements

