



SRPO-48G SRPO-60G SRPO-72G

FULL SIZE DECK OVENS

The Sierra range SRPO gas pizza and bake ovens feature a single deck that will always provide you with the perfect crust and a perfect bake. These ovens have a complete stainless steel exterior that is not only durable and resilient, it is easy to maintain and corrosion resistant. The doors of the Sierra SRPO deck ovens are insulated and spring-loaded. The doors of our ovens have proven the test of time. Each oven chamber features one Fibra-ment stone[®] with a 7" deck height and independently controlled top heat dampers for the most perfect results. These deck ovens achieve maximum heat while using less energy, and much quicker recovery times between uses. Choose from three widths: 48", 60" & 72", and ovens may be stacked. Inside depths are 36".

PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____



Heavy duty handle



Oven chamber

STANDARD FEATURES

- Heavy duty stainless steel legs
- Heavy duty construction and high quality stainless steel top, front and sides
- Cook directly on the deck or with pans and screens
- Door opening full size deck
- Modulating thermostat for energy efficiency low input BTU for faster recovery
- Tubular type burners are designed with 12" spacing for best heat distribution
- 1-1/2" refractory type hearth Fibra-ment stone[®]
- Temperature range: 300-650 degrees F
- Ovens are shipped from the factory ready for natural gas installation. An LP conversion kit is included with each unit.







Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com

MVP
GROUP
www.mvpgroupcorp.com

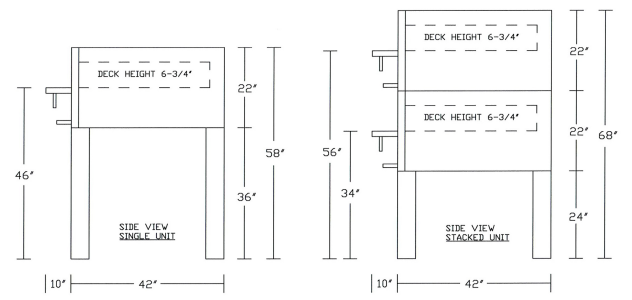
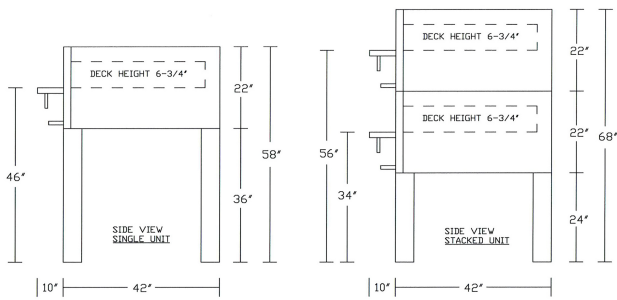


SRPO-48G | SRPO-48G-2

SRPO-60G | SRPO-60G-2

**SINGLE OVENS
WITH 36"
HEIGHT LEGS**

**DOUBLE STACKED
OVENS WITH 24"
HEIGHT LEGS**

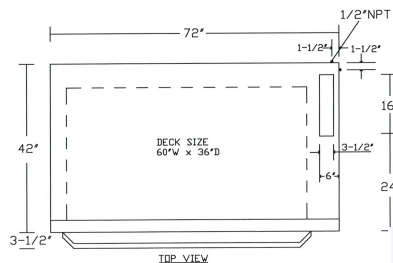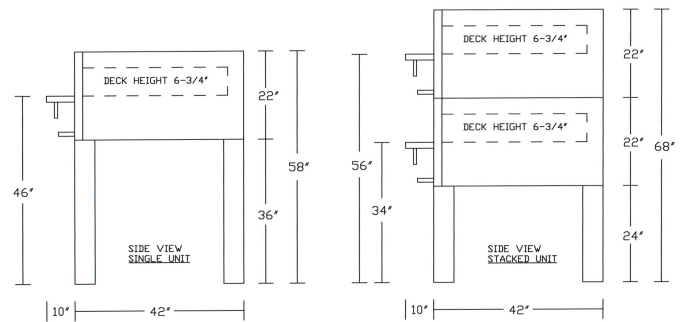

SRPO-72G | SRPO-72G-2

SPECIFICATIONS

MODEL NUMBER	COOKING SURFACE	OVERALL DIMENSIONS	BTU	SHIPPING WEIGHT
SRPO-48G	36" L X 36" D	48" L X 42" D	66,000	820 LBS
SRPO-60G	48" L X 36" D	60" L X 42" D	88,000	1020 LBS
SRPO-72G	60" L X 36" D	72" L X 42" D	110,000	1115 LBS
SRPO-48G-2	36" L X 36" D (2)	48" L X 42" D	132,000	1640 LBS
SRPO-60G-2	48" L X 36" D (2)	60" L X 42" D	176,000	2040 LBS
SRPO-72G-2	60" L X 36" D (2)	72" L X 42" D	220,000	2230 LBS

Warranty: 12 months parts & labor.

Gas Connection: 1/2" NPT on the right hand rear of the appliance.

Gas pressure: 5" W.C. - Natural Gas | 10" W.C. - Propane

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear
Specify type of gas and altitude, if over 2,000 feet, when ordering.

SIERRA RANGE is a registered trademark of **MVP Group**.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.



Intertek



Intertek



Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com



www.mvpgroupcorp.com