



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____

SRTG SERIES

THERMOSTAT GRIDDLES

Sierra Griddles feature all-stainless steel construction, the SRTG Series has a powerful capacity of 30,000 BTU per each "U" burner. The griddle feature a modern look and design, form and function fit for the most demanding kitchens at an affordable price. All with the ease of modular customization.

SRTG-24



* SRTG Griddles have an enlarged cooking depth of 20.6" to maximize your cooking surface area.

*Stainless steel stand with adjustable legs is optional

STANDARD FEATURES

- 🔥 All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge and valve controls
- 🔥 Heavy gauge welded front frame
- 🔥 "U" shaped burners rated at 30,000 BTU/hr. Located every 12" for even heat distribution on griddle surface
- 🔥 Precise temperature control from 200°F (93°C) to 450°F (232°C)
- 🔥 4" wide grease trough for easy cleaning
- 🔥 Removable grease tray with weep hole
- 🔥 One stainless steel standing pilot for each flute for instant ignition
- 🔥 Aeration baffles between "U" shaped burners to provide uniform surface temperature
- 🔥 Highly polished 1" thick steel griddle plates
- 🔥 Compact design for counter top use
- 🔥 4" Stainless steel legs with an adjustable increase of 1.5"
- 🔥 Features a full 5.7" landing edge for increased plate stability
- 🔥 The SRTG is shipped from the factory, ready for natural gas installation. An LP conversion kit is included with each unit




Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com

MVP
GROUP

www.mvpgroupcorp.com

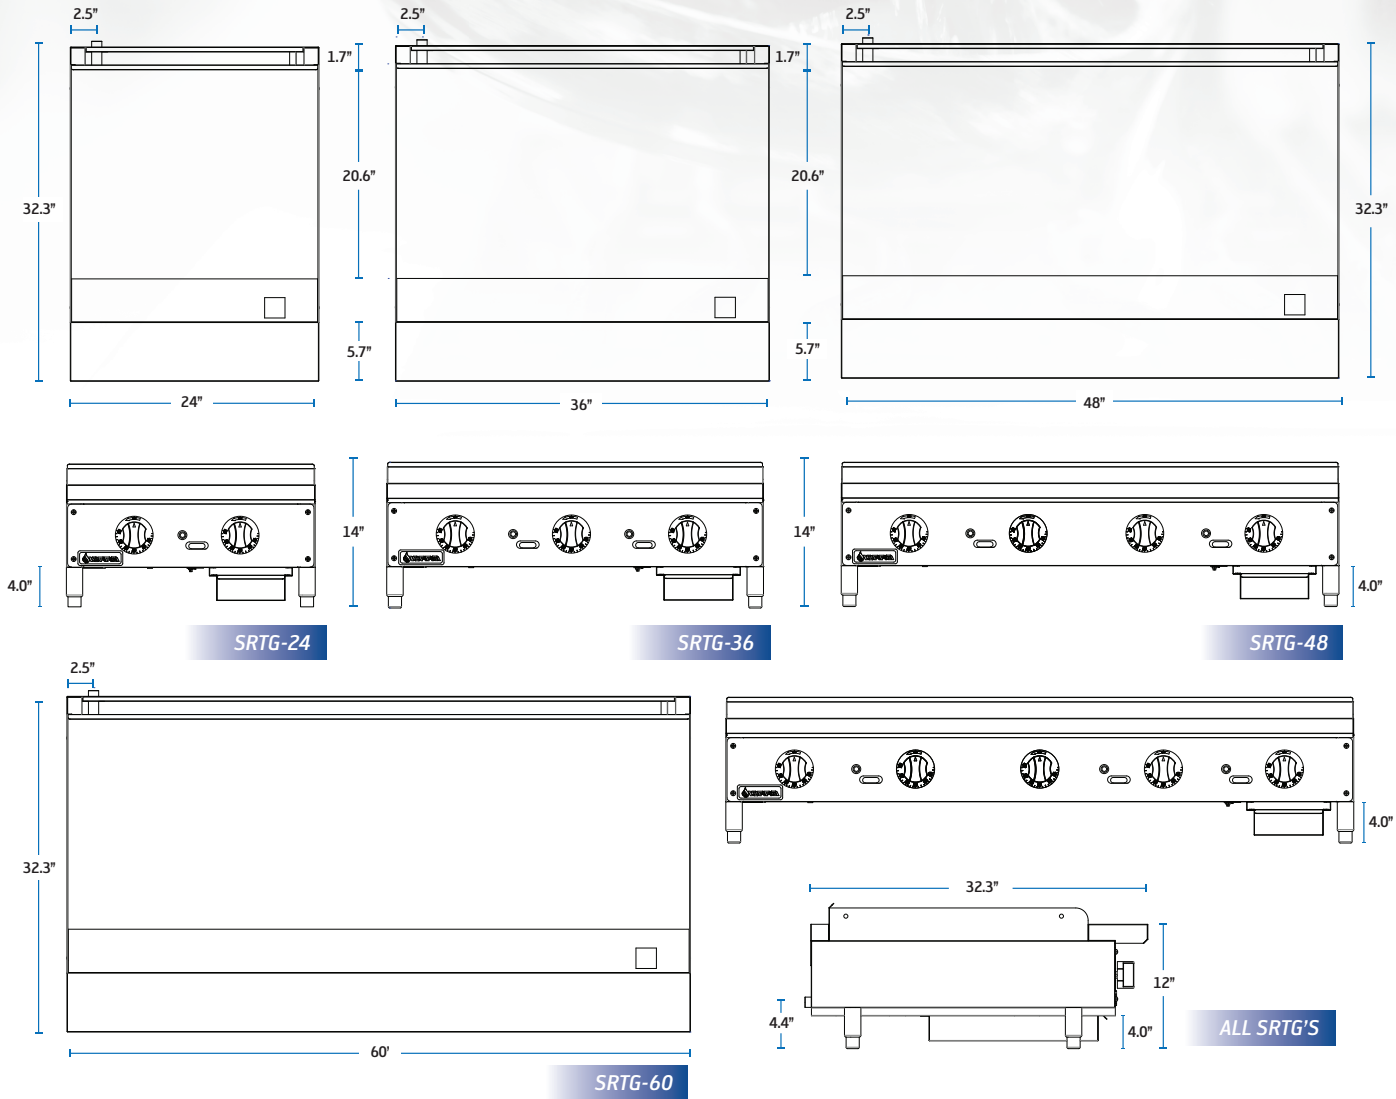

SPECIFICATIONS

| MODEL NUMBER | EXTERNAL DIMENSIONS (WxDxH) | NUMBER OF BURNERS | BTU'S PER BURNER | TOTAL BTU | NET WEIGHT | SHIPPING WEIGHT |
|--------------|-----------------------------|-------------------|------------------|-----------|------------|-----------------|
| SRTG-24 | 24" X 32.3" X 14" | 2 | 30,000 | 60,000 | 143 LBS | 174 LBS |
| SRTG-36 | 36" X 32.3" X 14" | 3 | 30,000 | 90,000 | 198 LBS | 242 LBS |
| SRTG-48 | 48" X 32.3" X 14" | 4 | 30,000 | 120,000 | 253 LBS | 304 LBS |
| SRTG-60 | 60" X 32.3" X 14" | 5 | 30,000 | 150,000 | 308 LBS | 372 LBS |



Warranty: 12 months parts & labor.

Gas Connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected here by the installer.

Gas pressure: 4" W.C. - Natural Gas | 10" W.C. - Propane

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear
Specify type of gas and altitude, if over 2,000 feet, when ordering.

SIERRA RANGE is a registered trademark of **MVP Group**.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.



Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com