

RESTAURANT SERIES STOCK POT RANGES

SERIES: BPSP



handle large stock pots. Choose from 90,000 to 210,000 BTUH burners in a variety of configurations, including with one or two burners and two or three gas valves each. Burners are equipped with two continuous pilots for instant ignition. Lift-off, cast-iron top grates stand up to heavy pots, while the stainless steel, cabinet-style base adds durability and storage room. Other features include full-size, slide-out drip pans for easy cleanup and cooltouch knobs.

The wok models feature cool-touch knobs and a 125,000 BTUH jet burner with a durable wok ring (not detachable) with rolled front edge to prevent spills.

FEATURES AT A GLANCE

- Stainless steel front, side, and cabinet base
- · Three-ring burners
- Two valves per burner, each with continuous pilot
- 90,000 to 210,000 BTUH on stock pots
- 125,000 BTUH on wok model
- Slide-out drip pans
- · Cool-touch knobs
- Heavy-duty, cast-iron top grate
- Chrome-plated, 6" (152 mm) legs with adjustable feet

OPTIONS & ACCESSORIES

- Quick disconnect and flexible gas hose
- Three valves per three-ring burner








RESTAURANT SERIES STOCK POT RANGES

SERIES: BPSP

EQUIPMENT DIMENSIONS

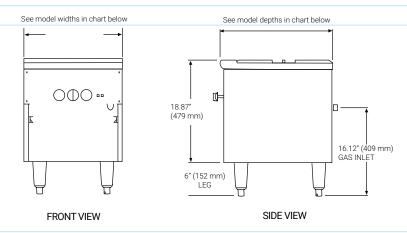

MECHANICAL SPECIFICATIONS

Model #	Total BTUH	Burners	Valves	Wok Size	Overall Dim (W x H x D)	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt.
BPSP-18-2	90,000	One 3 ring	2		18" x 24.87" x 21" (457 x 632 x 533)				130 (59kg)
BPSP-18-3	105,000	One 3 ring	3		18" x 24.87" x 21" (457 x 632 x 533)				135 (61kg)
BPSP-18-2-D	180,000	Two 3 ring	2		18" x 24.87" x 42" (457 x 632 x 1067)				255 (116kg)
BPSP-18-3-D	210,000	Two 3 ring	3		18" x 24.87" x 42" (457 x 632 x 1067)				260 (118kg)
BPSP-36-2-D	180,000	Two 3 ring	2		36" x 24.87" x 21" (914 x 632 x 533)				260 (118kg)
BPSP-36-3-D	210,000	Two 3 ring	3		36" x 24.87" x 21" (914 x 632 x 533)				265 (120kg)
BPSP-18J-13	125,000	18 orifice jet	1	13"	18" x 30" x 21.5" (457 x 762 x 546)				105 (48kg)
BPSP-18J-16	125,000	18 orifice jet	1	16"	18" x 30" x 21.5" (457 x 762 x 546)				105 (48kg)
*Height includes 6" (152 mm) legs.						,		'

REQUIRED CLEARANCES

RANCES GAS CONNECTIONS

Combustible
Left 10" (254 mm)
Right 10" (254 mm)
Back 4" (254 mm)

Manifold pressure is 5.0" W.C. or natural gas o 10.0" for propane gas. Manifold size is 3/4" NPT.

3/4" pressure regulator supplied with equipment to be installed at time of connection. Must specify type of gas and elevation if over 2000 ft. when ordering.





Freight Class: 70 FOB: Allen, 75013 Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Bakers Pride Oven Company, LLC is a wholly owned subsidiary of Standex International Corporation.





