



MODEL C1300 Hot Water Dispenser

APPLICATION: Designed for large volume usage of steaming hot water. Up to 100 cups of 200° hot water per hour are provided by the system's 2/3-gallon tank. Saves time, work and water – you only heat the water you use.

FEATURES

- Foodservice grade heating element provides 100 cups of near-boiling water per hour
- Swiveling gooseneck spout travels 90° to provide clearance for large vessels
- Easy-action lever with automatic shut-off
- Durable all brass faucet with polished chrome finish
- 2/3-gallon Stainless Steel Tank construction for longer life
- Easy-to-adjust temperature control on front panel
- Mounts in standard sink opening or 1-1/4" drilled hole
- Tool-free tank connections and dry start protection for easy installation
- 1-year full warranty on parts and labor




SPECIFICATIONS

Capacity	2/3-gallon tank dispenses 100 cups of 200°F water per hour
Electrical	115 Volts A.C., 1300 Watts, 11.3 amp heating element with 36" cord and grounded plug
Thermostat	Snap action, adjustable from 160°F to 210°F (factory pre-set at approximately 200°F)
Insulation	Meets U.L. 94HF-1 flammability specification
Valve	Instant, self-closing
Recommended Supply Pressure	30-125 psi
Shipping Weight	Approximately 11.5 lbs.

To ensure optimum performance, maximum distance between tank and base of faucet should be 14-1/2" or less.

DIMENSIONS

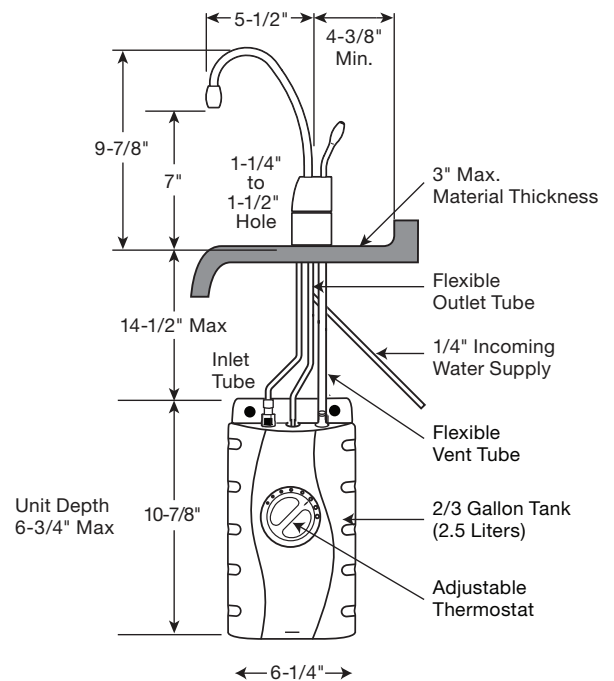

Our products appear on **The KCL CADalog** CD-ROM based CAD Foodservice Symbol Library. More information is available from **Kochman Consultants, Ltd.** at www.klccad.com.



1.800.845.8345
www.insinkerator.com/foodservice