



STAINLESS STEEL ECONOMY EQUIPMENT STANDS



Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____



Featuring as Standard:
"THE PROVEN"
 ORIGINAL ADVANCE TABCO
**Adjustable Undershelf
 with Die Cast Leg Clamp**

L	24" Wide	Wt.	30" Wide	Wt.
15"	--	--	EG-LG-3015-X	29 lbs.
18"	--	--	EG-LG-3018-X	32 lbs.
24"	EG-LG-242-X	43 lbs.	EG-LG-302-X	47 lbs.
30"	--	--	EG-LG-300-X	54 lbs.
36"	EG-LG-243-X	50 lbs.	EG-LG-303-X	62 lbs.
48"	EG-LG-244-X	68 lbs.	EG-LG-304-X	78 lbs.
60"	EG-LG-245-X	80 lbs.	EG-LG-305-X	84 lbs.
72"	EG-LG-246-X	96 lbs.	EG-LG-306-X	110 lbs.

FEATURES:

TOP is furnished with 1" hemmed edge splash on rear and both sides.
 Undershelf is adjustable.
 Aluminum die cast "leg to shelf" clamp secures shelf to leg eliminating unsightly nuts and bolts.

CONSTRUCTION:

All TIG welded. Exposed weld areas finished to match adjacent surfaces.
 Entire Top is mechanically polished to a satin finish and is sound deadened.
 Galvanized hat channels are secured to top by means of structural adhesive and weld studs.
 Gussets welded to support hat sections.

MATERIAL:

TOP is 18 gauge stainless steel type "430" series with galvanized understructure.
 SHELF is galvanized steel.
 LEGS are 1 5/8" diameter galvanized steel with plastic bullet feet.

NOTE: "L" = Clear (inside nominal) dimension
 Overall length = "L" + 1/4"

Optional X.H.D. Casters
 TA-25EG-X Set of 4
 Each Set Supplied w/ 2 Brakes.
 (225 lbs. Load Capacity Per Caster)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
 Fax: (631) 242-6900

GEORGIA
 Fax: (770) 775-5625

TEXAS
 Fax: (972) 932-4795


NEVADA
 Fax: (775) 972-1578

DETAILS and SPECIFICATIONS



TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

Maximum Total Load = 400 lbs.

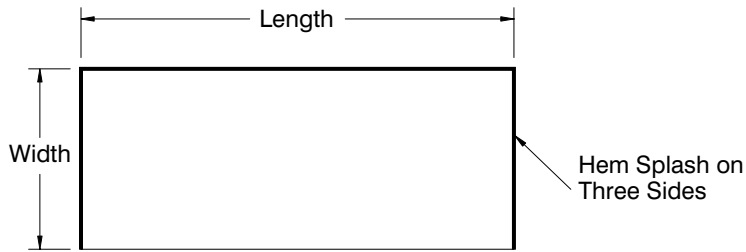

24" Working Height

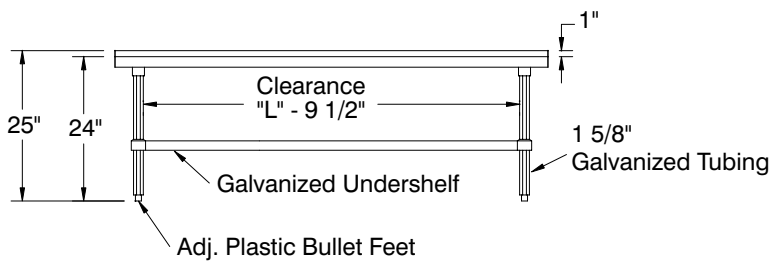

Mobile Unit

Optional X.H.D. Casters
TA-25EG-X Set of 4
Each Set Supplied w/ 2 Brakes.
(225 lbs. Load Capacity Per Caster)

